


Ryver - Black Exposed Thermostatic Shower

| | |
|-------------------------|---|
| CONSTRUCTION | Valve: High Performance Polyamide (PPA) Body & Zinc-Alloy Casing; SS201 Stainless Steel Riser Rail & Base Plates; Zinc-Alloy Handles |
| FINISHES | Matt Black Electro Plated Finish |
| PRODUCT TYPE | Contemporary |
| WATER PRESSURE | Min. 1.0 bar, Max. 6.0 bar |
| PLUMBING SYSTEMS | Suitable for all plumbing systems, preferably balanced. Min. supply pressure differential requirement is 5:1 |
| STANDARDS | Complies with BSEN 1111 |
| CERTIFICATION | Manufactured to comply with WRAS & TMV2 |
| CARTRIDGE | On/Off Cartridge: Wanhai Thermostatic Cartridge: Wanhai |
| FITTING | Easy Fit Kit - Brass G1/2" BSP Male bottom outlet & G3/4" BSP Male upper outlet connection |
| ADDITIONAL INFO | Temperature Pre-set 38°C, with push button to override to 48°C Automatic shut off in the event of hot or cold water supply failure COOL Touch Bar Valve Technology Triple Function Push Button Handset Premium Antibacterial PVC Hose 1.5m Telescopic Adjustable Height Riser Rail |

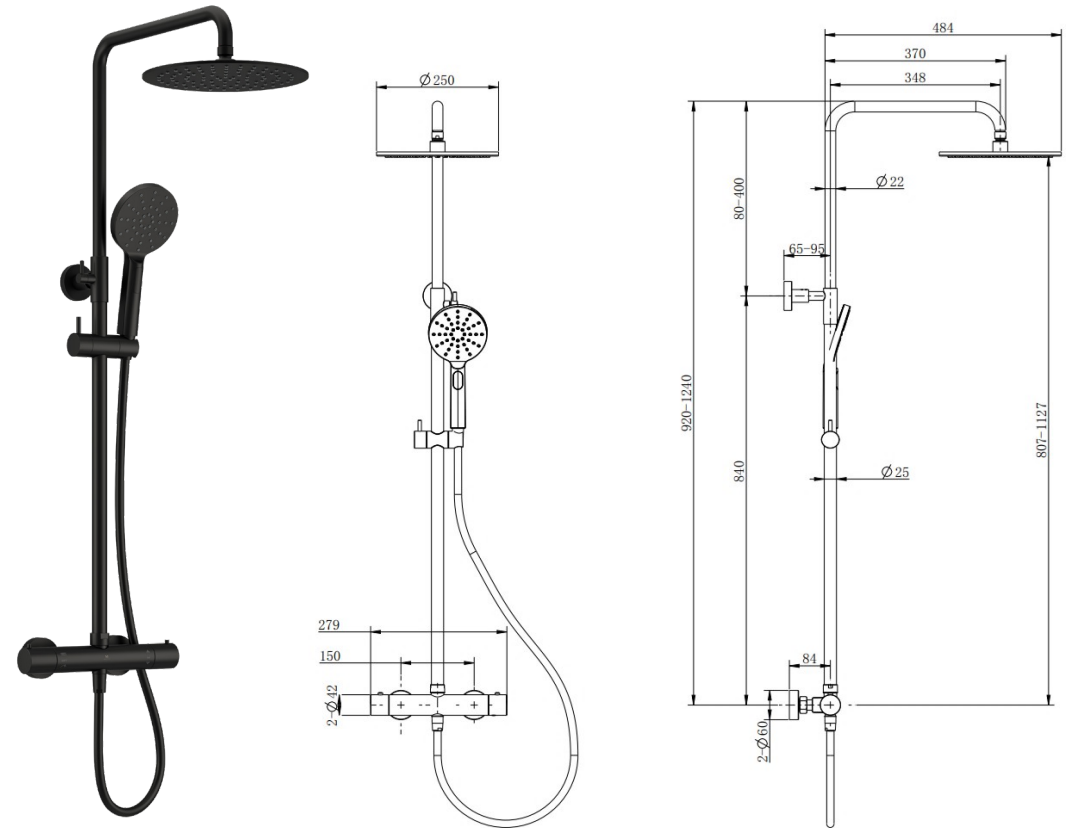

Flow Rates (Litres per minute)

| SYSTEM PRESSURE | 0.1 Bar | 0.2 Bar | 0.3 Bar | 0.5 Bar | 1.0 Bar | 1.5 Bar | 2.0 Bar | 3.0 Bar | 4.0 Bar | 5.0 Bar |
|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| | 4.5 | 6.5 | 8.1 | 10.6 | 15.2 | - | - | - | - | - |

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.